




Model FD-SAVG Curtain Fire Damper

UL 555 Classified 1-1/2 and 3 hours for behind grille

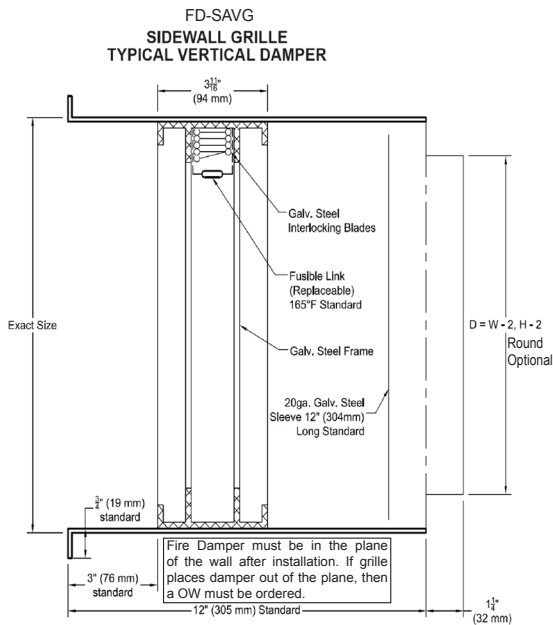

Application

- The Model FD-SAVG is UL Classified for installation in walls, and partitions with a fire rating of less than 3 hours.
- This damper may be installed vertically or horizontally in static systems that shut down in the event of fire. (See optional 3 hr rating)

Standard Construction

- Frame: Roll formed Frame - 22 ga. Galvanized Steel - Sleeved
- Sleeve: 20 ga. Galvanized - 12" Length (305mm) Standard
- Blades: Low Profile Roll Formed - 22 ga. Galvanized Steel
- Flange: 3/4"
- Fusible Link - UL-33: UL Classified 165°F (Standard), 212°F (Optional)
- Dampers are furnished approximate to the duct dimensions provided, unless otherwise noted

Model FD-SAVG meets or complies with the following as a fire damper:

- All major building codes, including IBC/ICC International Code
- UL 555 Classified 1-1/2 & 3 Hour - File #R27198
- NFPA - 90A, 80

Sizes (duct) 1-1/2 & 3 Hour

Rectangular

Min. Vertical

4"W X 4"H, 102mm X 102mm

Max. Vertical

48"W X 36"H, 1219mm X 914mm or 36"W X 48"H, 914mm X 1219mm

*Round

Min. Vertical 4", 102mm

Max. Vertical 46", 1168mm

*Optional

Options

- Factory Sleeve (18 Ga min.)
- Retaining Angles
 - One Side
- 3 Hour Rating
- Damper Setback location
- 212°F (100°C) Fuse Link

Due to continuing research, MAT reserves the right to change specifications without notice.

FD-SAVG

Represented by:

6235 South Oak Park Avenue Chicago, IL 60638 USA

Toll free: 800.585.7686 +1.708.552.4040

Fax: +1.708.594.0396 www.metairtech.com