




## Quick-Connect Start Collar

### Collar Specifications

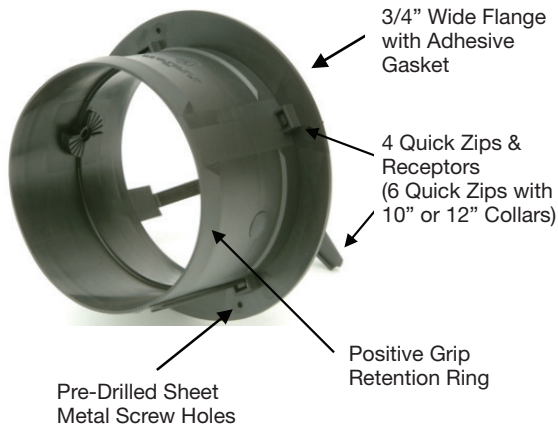

### Application

Start Collar for forced air heating and central air systems for residential and light commercial projects. Attaches to sheet metal and duct board up to 2" thick.

### Standard Construction

- High density black plastic
- UV resistant plastic
- UL Classified for plenum use
- Durable and lightweight
- Dent and rust-proof
- Total collar height = 4.06"
- Flange to top of collar height = 3"
- Universal collar works on both sheetmetal and duct board up to 2"
- Zips tightly to sheet metal trunk lines
- Installs in seconds with integral adhesive gasket and Quick-Zip™ mounting
- Start Collar designed to easily pre-install flex

### Available Sizes

5",6",7",8",10" and 12"

Models available with or without pre-assembled damper




*Havaco Technologies products are distributed by MAT.*

### Damper Model Specifications

Adjusts to 6 positions for optimal balancing

Stay-In-Place Damper Ratchet System

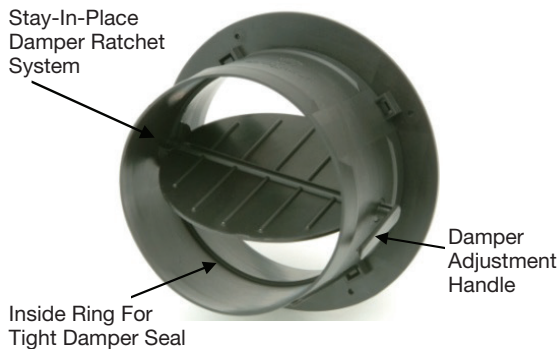

Due to continuing research, MAT reserves the right to change specifications without notice.

### Models DTKT

6235 South Oak Park Avenue Chicago, IL 60638 USA  
Toll free: 800.585.7686 +1.708.552.4040  
Fax: +1.708.594.0396 www.metairtech.com

Represented by:



## Installation Instructions


**Step 1**  
Insert Quick Zips into Collar

**Step 2**  
Remove Gasket Cover Paper

**Step 3**  
Insert and Pull Quick Zips Tight



Step 1

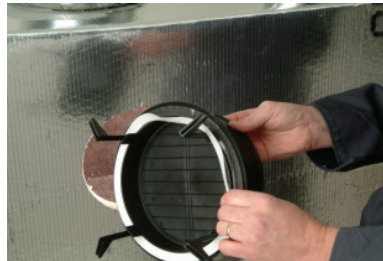

Step 2



Step 3