




Model FD-AUSL Ultra Slimline Curtain Fire Damper

UL 555 Classified 1-1/2 and 3 hours for use in static systems

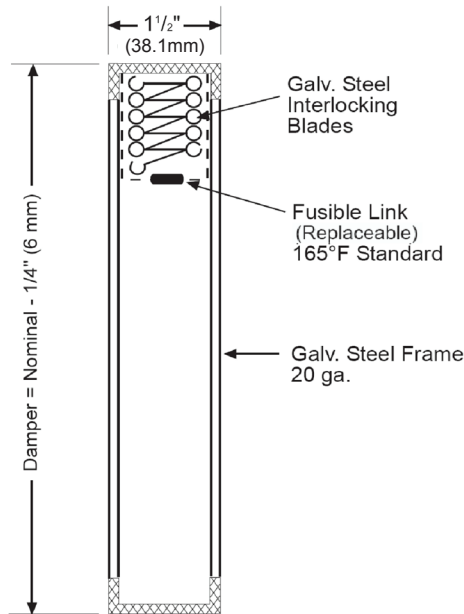

Application

- The Model FD-AUSL is UL Classified for installation in walls, and partitions with a fire rating of less than 3 hours.
- This damper may be installed vertically in static HVAC systems that automatically shut down in the event of fire. (See optional 3 hr rating)

Standard Construction

- Frame: Roll formed Frame - 22 ga. Galvanized Steel
- Blades: Low Profile Roll Formed - 22 ga. Galvanized Steel
- Fusible Link - UL-33: UL Classified 165°F (Standard), 212°F (Optional)
- Dampers are furnished approximate to the duct dimensions provided, unless otherwise noted
- Dampers are furnished approximately 1/4" undersized to the duct dimensions provided, unless otherwise noted.

Model FD-AUSL meets or complies with the following as a fire damper:

- All major building codes, including IBC/ICC International Code
- UL 555 Classified 1-1/2 and 3 Hour - File #R27198
- NFPA - 90A, 80

Sizes (duct) 1-1/2 & 3 Hour

Min. V or H 4" X 4", 102mm X 102mm
Max. Vertical 40"W X 40"H, 1016mm X 1016mm

Options

- Factory Sleeve (20 Ga min.)
- Retaining Angles
 - One Side
 - Both Sides
- 3 Hour Rating

Due to continuing research, MAT reserves the right to change specifications without notice.

FD-AUSL (Ultra Slimline)

Represented by:

6235 South Oak Park Avenue Chicago, IL 60638 USA
 Toll free: 800.585.7686 +1.708.552.4040
 Fax: +1.708.594.0396 www.metairtech.com