MAT
Metropolitan Air Technology

The leader in air flow control technology

The RT-250 Submittal Data

Project: **Date:**

Architect: **Engineer:** **Contractor:**

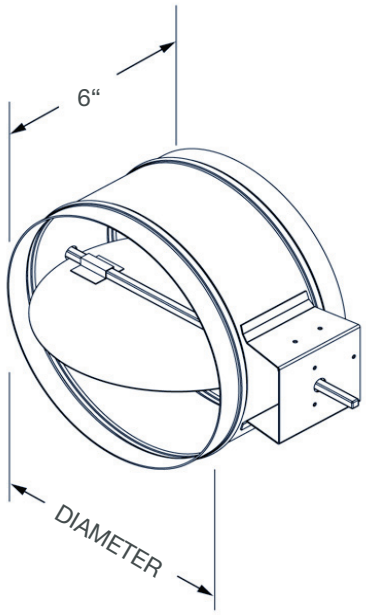

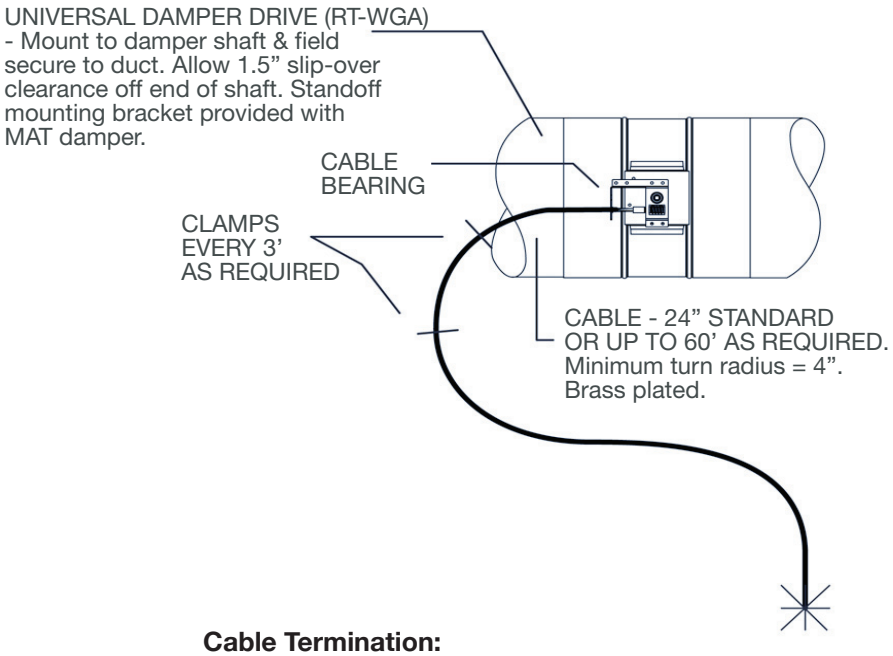

Standard Damper Construction:

- 20 ga. galvanized steel with rolled bead stiffeners
- Reinforced blade, self lubricating bearings
- Stand off bracket for mounting RT-WGA drive
- .3/8” square (flat/flat) axles assures non slip connection
- Operating temperature = -40° to 200° F.
- Maximum velocity = 1500 FPM
- Furnished 1/8" undersized for male slip-in

US Patent #5,702,298 Canadian Patent #2,185,311

Cable Termination:

- RT-CCR Round Ceiling Cup
- RT-CCS Rectangular Ceiling/Wall Cup
- RT-CCM Round Miniature Ceiling Cup
- RT-MB Mounting Bracket
- RT-CCK Rectangular Wall Cup with Knob
- RT-CCE Environmental Control Box
- RT-CCD Surface Mount Box
- MAT-1003 Angle bracket

Location/System	Qty.	Duct Nominal Dia.	Cable Length	Termination

6235 South Oak Park Avenue Chicago, IL 60638 USA
Toll free: 800.585.7686 708.552.4040
Fax: 708.594.0396 www.metairtech.com

Represented by:

© 2009 Steelhead Corp. All rights reserved.